

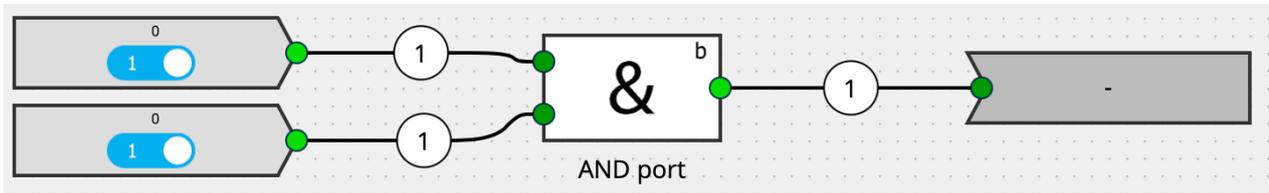


# xxter logic manual

<b>XXTER LOGIC INTRODUCTION</b>	<b>2</b>
<b>CONFIGURING LOGIC</b>	<b>2</b>
<b>TESTING LOGIC</b>	<b>3</b>
<b>COMMISSIONING LOGIC</b>	<b>4</b>
<b>ADDENDUM: LOGIC ELEMENTS</b>	<b>5</b>

## xxter logic introduction

With the xxter logic module you can create and test logic schematics in an intuitive graphical environment, and apply it in the home or building automation.



There are many different logical blocks available, varying from simple AND ports to virtual dimmers. By combining multiple blocks in one schema, you can create complex automations.

This manual explains how a logic schematic can be created, how you can test it and how to commission it. As an addendum to this manual an overview is included of all the existing logic elements, with a complete explanation how they can be used.

More information about xxter can be found on our website [www.xxter.com](http://www.xxter.com) and on our forum [forum.xxter.com](http://forum.xxter.com). On our website, you can also find our installation and user manuals.

## Configuring logic

The xxter logic configuration is done online, in the *My xxter* environment (<https://my.xxter.com/>). Login with your professional account and select the xxter project for which you want to configure a logic schematic. Select the “Logic” option on the left-hand side.

Logic

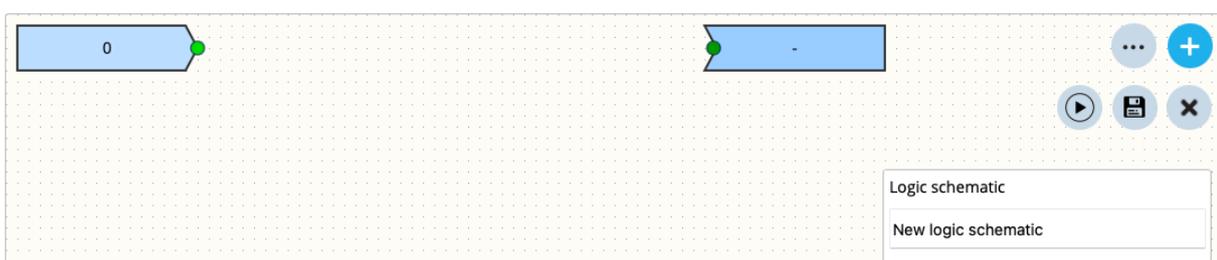
Logic schematic



Add

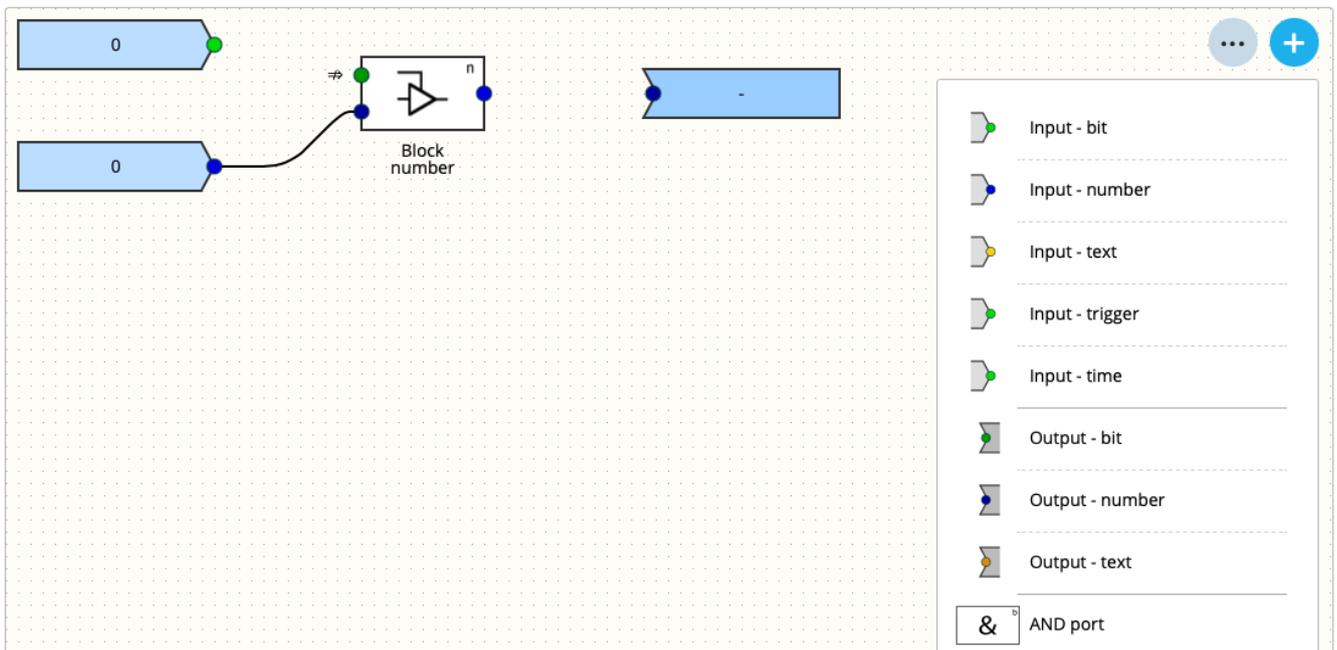
On this page you can add a new logic schematic and edit, duplicate and delete existing schematics. You can disable a schematic (so it will not be executed) by clicking on the checkbox in front of the name.

When you add or edit a schematic, the schema editor will open. In a new schematic, by default a binary input and binary output will be displayed. By clicking on the plus icon on the top right of the screen, you can add logic elements. By clicking on the three dots, you can rename a schematic, save it and close the editor. From this menu, you also start the schematic simulator.



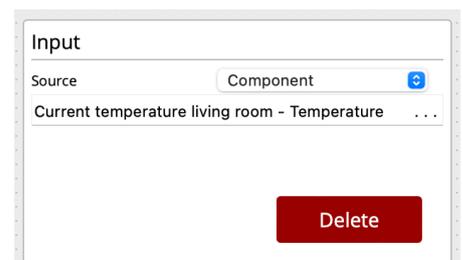
Every input, output or logical block is clearly colour coded on the connectors, indicating which data type can be connected. Green means a binary input (1 or 0), blue a numeric value and yellow a textual value. Outgoing connectors are lighter in colour and an incoming connector is darker in colour. Logical blocks can only be connected to connectors of the same type. You can connect up to 10 lines to one connector (incoming or outgoing).

You can connect elements by dragging your mouse from one connector to the other. It is not mandatory to always connect all connectors of a logical block. If no connector is connected, that input is simply ignored.



Every input, output or logical block has parameters. For instance, an input can be set up as a constant, or be linked to a component from the automation.

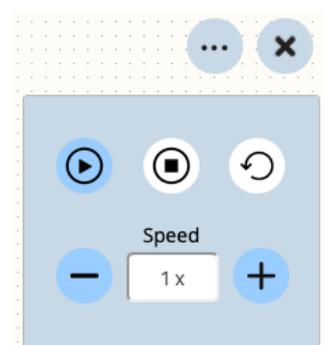
By clicking on the element, the parameters will be shown on the right-hand side of the screen. From this panel you can also delete an element. An overview of all elements and their parameters is included at the end of this manual.



When you have created a logic schematic, don't forget to save it, using the icon with the three dots. From this menu, you can also close the schematic editor.

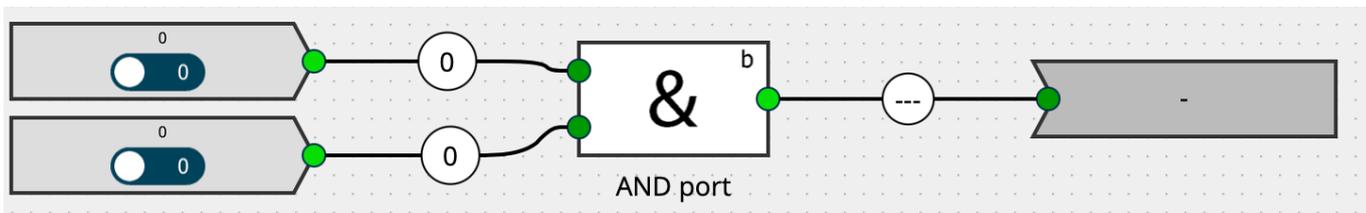
## Testing logic

Before commissioning logic in the automated home or building, we advise to always test the schematic first. By clicking on the icon with the three dots and then on the play icon, the schematic will reopen in simulation mode. In this mode it is not possible to make changes to the schematic. By pressing the cross icon in the top right corner, you will return to edit mode.

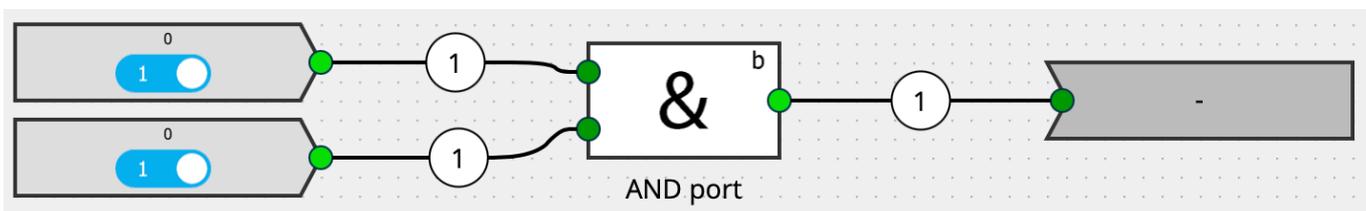
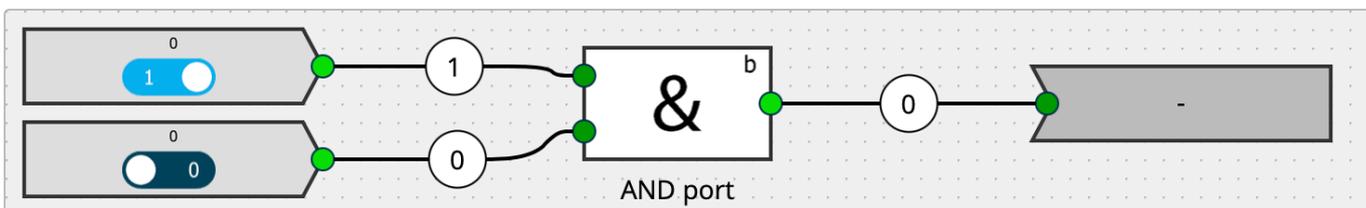


In simulation mode, you can use the menu with the three dots to start and stop the simulation, reset the simulation or change the speed of the simulation. The speed is particularly relevant for logical blocks that perform actions over time, like for instance a light timer, watchdog or delay module.

In simulation mode, you can manually assign virtual values to all inputs. Initially all values are always 0.



When you change a value of an input, the connected logical block is activated and the logic is performed. On the outgoing connector(s) the value will be shown, which is the result of the logic. This way, you can test if the logic schematic works as intended.



## Commissioning logic

When you are happy with the logic schematic you created, don't forget to save it, before closing the editor.



Load configuration

By loading the appropriate xxter project, for which you have created the schematic, on the xxter controller, the logic schematic will become active.

To do this, log in on the xxter controller and press "Load configuration".

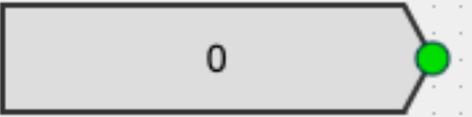
You can verify how the logic is running real time, by enabling the user log for logic, on the *Basic – Settings* page of the xxter controller. When you open the user log, you can see that the input changes for any logical block are logged as well as the resulting output. Every logical block has a unique ID, which can be found in the online logic editor in the *Parameters* window.

## Addendum: Logic elements

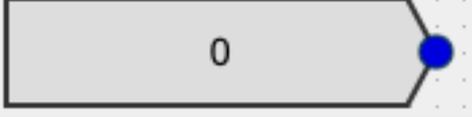
There are many different logic elements that can be used in a logic schematic. In this addendum all existing logic elements are listed with an explanation how they work, which parameters are available and what the available inputs and outputs are.

### Inputs

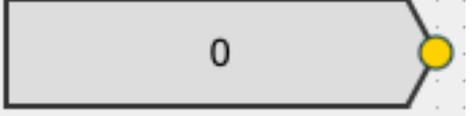
#### 1. Input - bit

	<p>Binary input that can be used as an input for other logic blocks.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Type: <ul style="list-style-type: none"> <li>o Component</li> <li>o Constant value</li> </ul> </li> <li>- Constant value <ul style="list-style-type: none"> <li>- Depending type: Constant for the input, either 1 / ON or 0 / OFF</li> </ul> </li> <li>- Component <ul style="list-style-type: none"> <li>- Depending type: Binary value from the project</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- n/a</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Binary value, depending on parameters</li> </ul>

#### 2. Input - number

	<p>Number input that can be used as an input for other logic blocks.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Type: <ul style="list-style-type: none"> <li>o Component</li> <li>o Constant value</li> </ul> </li> <li>- Constant value <ul style="list-style-type: none"> <li>- Depending type: Constant for the input, numeric value</li> </ul> </li> <li>- Component <ul style="list-style-type: none"> <li>- Depending type: Numeric value from the project</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- n/a</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Numeric value, depending on parameters</li> </ul>

#### 3. Input – text

	<p>Text input that can be used as an input for other logic blocks.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Type: <ul style="list-style-type: none"> <li>o Component</li> <li>o Constant value</li> </ul> </li> <li>- Constant value <ul style="list-style-type: none"> <li>- Depending type: Constant for the input, textual value</li> </ul> </li> <li>- Component <ul style="list-style-type: none"> <li>- Depending type: Textual value from the project</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- n/a</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Textual value, depending on parameters</li> </ul>

#### 4. Input – trigger

	<p>Binary input that can be used as an input for other logic blocks. The binary output will be 1 / ON if the trigger is active. Only the Artnet trigger can also give a 0 / OFF as a trigger.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Type: <ul style="list-style-type: none"> <li>○ HTTP trigger                      - Activated HTTP trigger</li> <li>○ SIP trigger                         - Activated SIP trigger</li> <li>○ DoorBird trigger                 - Activated trigger from a DoorBird intercom</li> <li>○ Artnet trigger                      - Artnet trigger, gives a 1 when the value is greater than 0, otherwise 0</li> <li>○ Presence detection               - Detected presence of one or more persons</li> <li>○ Page opened                       - Opened page in the visualization</li> <li>○ Location trigger                  - Detected presence based on an iBeacon</li> </ul> </li> <li>- Trigger settings                   - Depending type</li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- n/a</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Binary value, gives 1 / ON if the condition is met</li> </ul>

#### 5. Input – time

	<p>Binary input that can be used as an input for other logic blocks. The binary output will be set to 1 / ON at the start time and 0 / OFF on the end time.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Weekdays                         - Which weekdays (Monday to Sunday) the time trigger should work</li> <li>- Start time                         - Start time or the time before or after sunrise or sunset, when the binary output should become 1 / ON</li> <li>- End time                            - End time or the time before or after sunrise or sunset, when the binary output should become 0 / OFF</li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- n/a</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Binary value, gives 1 / ON and 0 / OFF depending on start and end time.</li> </ul>

### Outputs

#### 6. Output– bit

	<p>Binary output that can be used to process the result of the logic blocks.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Destination: <ul style="list-style-type: none"> <li>○ Component                         - Component from the project</li> <li>○ Scene                                - Scene from the project, with optional action depending on value</li> <li>○ Script                                - Script from the project, with optional action depending on value</li> <li>○ Command                            - Command from the project (2 options, depending on value)</li> <li>○ Presence simulation               - Start, Stop or Record of the simulation, depending on value</li> <li>○ Alert service                       - Alert service, to which a value can be passed</li> </ul> </li> <li>- Details destination                - Depending on destination, 1 or 2 parameters</li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Binary input</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- n/a</li> </ul>

## 7. Output – number

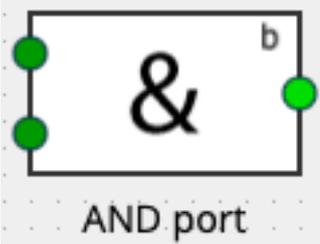
	<p>Numeric output that can be used to process the result of the logic blocks.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Destination: <ul style="list-style-type: none"> <li>o Component - Component from the project</li> <li>o Command - Command from the project, to which a value can be passed</li> <li>o Alert service - Alert service, to which a value can be passed</li> </ul> </li> <li>- Details destination - Depending on destination</li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Numeric input</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- n/a</li> </ul>

## 8. Output – text

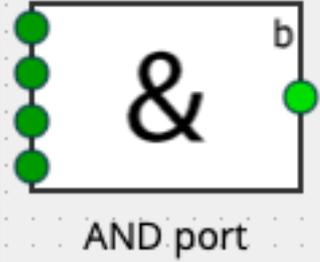
	<p>Textual output that can be used to process the result of the logic blocks.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Destination: <ul style="list-style-type: none"> <li>o Component - Component from the project</li> <li>o Alert service - Alert service, to which a value can be passed</li> </ul> </li> <li>- Details destination - Depending on destination</li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Textual input</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- n/a</li> </ul>

## Basic blocks

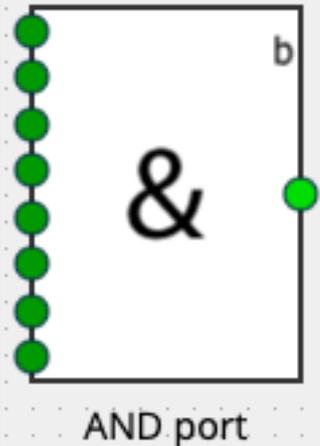
### 9. AND port

	<p>Twofold AND port, giving output 1 / ON when all inputs are 1 / ON and in all other cases 0 / OFF. The output can also be inverted.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Send output <ul style="list-style-type: none"> <li>o On any input - Every new value on an input produces a new output value</li> <li>o On any input change - Only if one of the input values change, an output value is sent</li> <li>o On output change - Only if the output value changes, it is sent</li> </ul> </li> <li>- Output value <ul style="list-style-type: none"> <li>o Normal - Gives "1 / ON" if the logic is valid</li> <li>o Invert - Gives "0 / OFF" if the logic is valid</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- 2x Binary input</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Binary output</li> </ul>

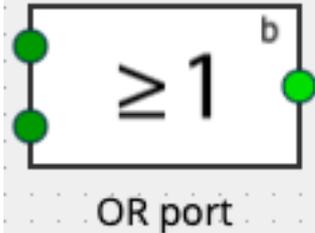
### 10. AND port [4v]

	<p>Fourfold AND port, giving output 1 / ON when all inputs are 1 / ON and in all other cases 0 / OFF. The output can also be inverted.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Send output <ul style="list-style-type: none"> <li>o On any input - Every new value on an input produces a new output value</li> <li>o On any input change - Only if one of the input values change, an output value is sent</li> <li>o On output change - Only if the output value changes, it is sent</li> </ul> </li> <li>- Output value <ul style="list-style-type: none"> <li>o Normal - Gives "1 / ON" if the logic is valid</li> <li>o Invert - Gives "0 / OFF" if the logic is valid</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- 4x Binary input</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Binary output</li> </ul>

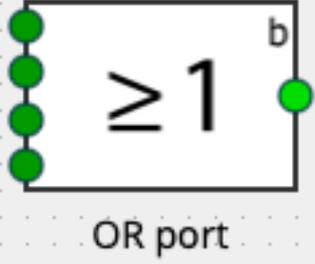
### 11. AND port [8v]

	<p>Eightfold AND port, giving output 1 / ON when all inputs are 1 / ON and in all other cases 0 / OFF. The output can also be inverted.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Send output <ul style="list-style-type: none"> <li>o On any input - Every new value on an input produces a new output value</li> <li>o On any input change - Only if one of the input values change, an output value is sent</li> <li>o On output change - Only if the output value changes, it is sent</li> </ul> </li> <li>- Output value <ul style="list-style-type: none"> <li>o Normal - Gives "1 / ON" if the logic is valid</li> <li>o Invert - Gives "0 / OFF" if the logic is valid</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- 8x Binary input</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Binary output</li> </ul>

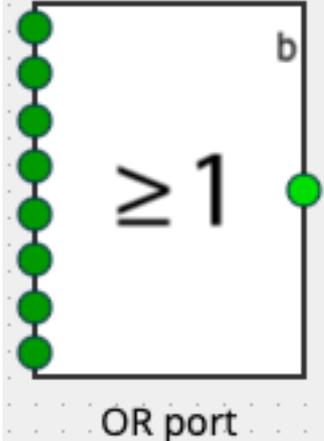
## 12. OR port

	<p>Twofold OR port, giving output 1 / ON when one the inputs is 1 / ON and if all the inputs are 0 / OFF, the output will also be 0 / OFF. The output can also be inverted.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Send output <ul style="list-style-type: none"> <li>o On any input - Every new value on an input produces a new output value</li> <li>o On any input change - Only if one of the input values change, an output value is sent</li> <li>o On output change - Only if the output value changes, it is sent</li> </ul> </li> <li>- Output value <ul style="list-style-type: none"> <li>o Normal - Gives "1 / ON" if the logic is valid</li> <li>o Invert - Gives "0 / OFF" if the logic is valid</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- 2x Binary input</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Binary output</li> </ul>

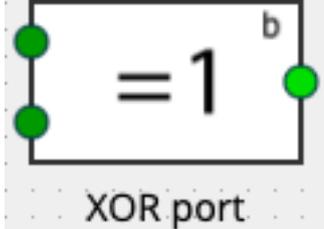
## 13. OR port [4v]

	<p>Fourfold OR port, giving output 1 / ON when one the inputs is 1 / ON and if all the inputs are 0 / OFF, the output will also be 0 / OFF. The output can also be inverted.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Send output <ul style="list-style-type: none"> <li>o On any input - Every new value on an input produces a new output value</li> <li>o On any input change - Only if one of the input values change, an output value is sent</li> <li>o On output change - Only if the output value changes, it is sent</li> </ul> </li> <li>- Output value <ul style="list-style-type: none"> <li>o Normal - Gives "1 / ON" if the logic is valid</li> <li>o Invert - Gives "0 / OFF" if the logic is valid</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- 4x Binary input</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Binary output</li> </ul>

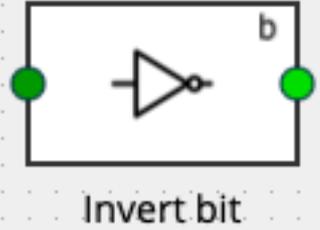
## 14. OR port [8v]

	<p>Eightfold OR port, giving output 1 / ON when one the inputs is 1 / ON and if all the inputs are 0 / OFF, the output will also be 0 / OFF. The output can also be inverted.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Send output <ul style="list-style-type: none"> <li>o On any input - Every new value on an input produces a new output value</li> <li>o On any input change - Only if one of the input values change, an output value is sent</li> <li>o On output change - Only if the output value changes, it is sent</li> </ul> </li> <li>- Output value <ul style="list-style-type: none"> <li>o Normal - Gives "1 / ON" if the logic is valid</li> <li>o Invert - Gives "0 / OFF" if the logic is valid</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- 8x Binary input</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Binary output</li> </ul>

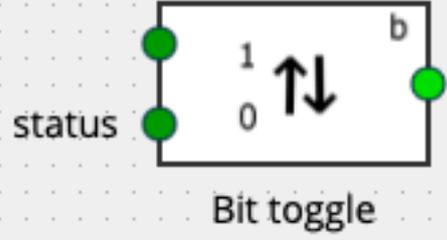
## 15. XOR port

	<p>Twofold exclusive OR port, giving output 1 / ON when exactly one the inputs is 1 / ON and the other input is 0 / OFF. Otherwise, the output will be 0 / OFF. The output can also be inverted.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Send output <ul style="list-style-type: none"> <li>o On any input - Every new value on an input produces a new output value</li> <li>o On any input change - Only if one of the input values change, an output value is sent</li> <li>o On output change - Only if the output value changes, it is sent</li> </ul> </li> <li>- Output value <ul style="list-style-type: none"> <li>o Normal - Gives "1 / ON" if the logic is valid</li> <li>o Invert - Gives "0 / OFF" if the logic is valid</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- 2x Binary input</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Binary output</li> </ul>

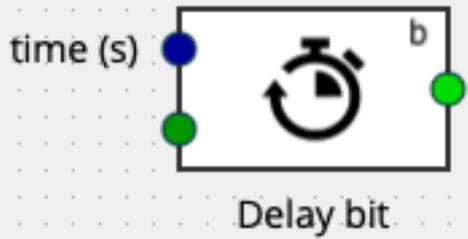
## 16. Invert bit

	<p>Binary inverter, giving output 1 / ON if the input is 0 / OFF and 0 / OFF if the input is 1 / ON.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Send output <ul style="list-style-type: none"> <li>o On any input - Every new value on an input produces a new output value</li> <li>o On output change - Only if the output value changes, it is sent</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- 1x Binary input</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Binary output</li> </ul>

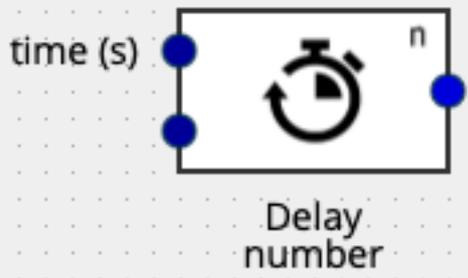
## 17. Bit toggle

	<p>Toggle, changing the output (1 / ON &gt; 0 / OFF or 0 / OFF &gt; 1 / ON) on every binary input or pulse. The status can be provided as additional input to be inverted on toggle.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Toggle on <ul style="list-style-type: none"> <li>o 0 (OFF) - Only change the output if a 0 is received</li> <li>o 1 (ON) - Only change the output if a 1 is received</li> <li>o 0 and 1 (OFF/ON) - Always change the output, regardless whether a 0 or 1 is received</li> </ul> </li> <li>- Send output <ul style="list-style-type: none"> <li>o On any input - Every new value on an input produces a new output value</li> <li>o On any input change - Only if one of the input values change, an output value is sent</li> <li>o On output change - Only if the output value changes, it is sent</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Binary input providing the pulse, leading to the toggle</li> <li>- Binary status, that should be inverted at toggle</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Binary output, giving the inverted value of the status input, according to the parameters</li> </ul>

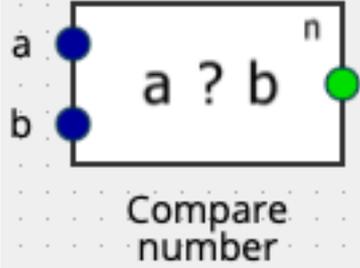
## 18. Delay bit

	<p>Delayed binary output, where the incoming telegram or pulse is sent on after the provided time.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Delay <ul style="list-style-type: none"> <li>o 0 (OFF) - Only change the output if a 0 is received</li> <li>o 1 (ON) - Only change the output if a 1 is received</li> <li>o 0 and 1 (OFF/ON) - Always change the output, regardless if a 0 or 1 is received</li> </ul> </li> <li>- Send output <ul style="list-style-type: none"> <li>o On any input - Every new value on an input produces a new output value</li> <li>o On any input change - Only if one of the input values change, an output value is sent</li> <li>o On output change - Only if the output value changes, it is sent</li> </ul> </li> <li>- Restart timer <ul style="list-style-type: none"> <li>o “-” - A new value on the input while the timer is running, will be ignored</li> <li>o On input - A new value on the input will always reset the timer</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Numeric input, providing the delay to be used in seconds</li> <li>- Binary input, that is to be delayed</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Binary output, that will be the same as the binary input, after the provided time has passed</li> </ul>

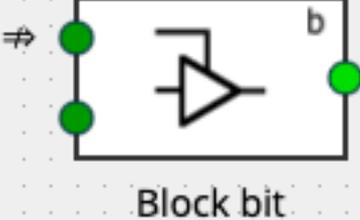
## 19. Delay number

	<p>Delayed numeric output, where the incoming numeric value is sent on after the provided time.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Send output <ul style="list-style-type: none"> <li>o On any input - Every new value on an input produces a new output value</li> <li>o On output change - Only if the output value changes, it is sent</li> </ul> </li> <li>- Restart timer <ul style="list-style-type: none"> <li>o “-” - A new value on the input while the timer is running, will be ignored</li> <li>o On input - A new value on the input will always reset the timer</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Numeric input, providing the delay to be used in seconds</li> <li>- Numeric input, that is to be delayed</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Numeric output, that will be the same as the numeric input, after the provided time has passed</li> </ul>

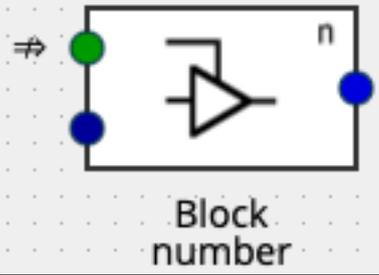
## 20. Compare number

	<p>Compares both incoming values according to the set parameter and provides the result as a binary output. For example, if the parameter is set as “A=B” and values A and B are both the same, the output will be 1 / ON, and otherwise 0 / OFF.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Compare value <ul style="list-style-type: none"> <li>o <math>A &lt; B</math> - A must be smaller than B</li> <li>o <math>A \leq B</math> - A must be smaller or equal to B</li> <li>o <math>A = B</math> - A must be equal to B</li> <li>o <math>A &gt; B</math> - A must be greater than B</li> <li>o <math>A \geq B</math> - A must be greater or equal to B</li> <li>o <math>A \neq B</math> - A must not be equal to B</li> </ul> </li> <li>- Send output <ul style="list-style-type: none"> <li>o On any input - Every new value on an input produces a new output value</li> <li>o On output change - Only if the output value changes, it is sent</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Numeric value A, to compare</li> <li>- Numeric value B, to compare</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Binary output, providing the result of the comparison</li> </ul>

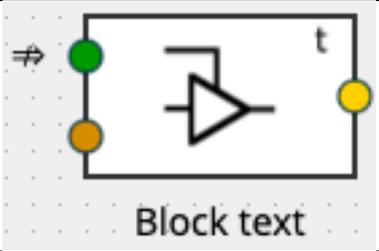
## 21. Block bit

	<p>Only passes the incoming binary value through as an output when it is not blocked.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Block input if <ul style="list-style-type: none"> <li>o Block = 0 - Block the input, if the blocking is BIT is set to 0 / OFF</li> <li>o Block = 1 - Block the input, if the blocking is BIT is set to 1 / ON</li> </ul> </li> <li>- Send when start blocking - Option to send an output when the input is blocked: disabled, 0 / OFF or 1 / ON</li> <li>- Send when stop blocking - Option to send an output when the input is no longer blocked: either disabled, 0 / OFF, 1 / ON or the current input value</li> <li>- Send output <ul style="list-style-type: none"> <li>o On any input - Every new value on an input produces a new output value</li> <li>o On any input change - Only if one of the input values change, an output value is sent</li> <li>o On output change - Only if the output value changes, it is sent</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Binary input, with the blocking BIT</li> <li>- Binary input, to pass through</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Binary output, passing on the incoming binary value if it is not blocked</li> </ul>

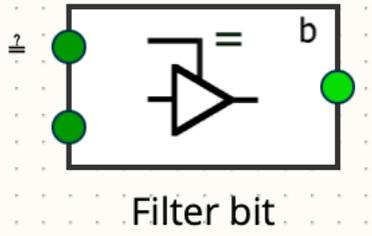
## 22. Block number

	<p>Only passes the incoming numeric value through as an output when it is not blocked.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Block input if <ul style="list-style-type: none"> <li>o Block = 0 - Block the input, if the blocking is BIT is set to 0 / OFF</li> <li>o Block = 1 - Block the input, if the blocking is BIT is set to 1 / ON</li> </ul> </li> <li>- Send when stop blocking - Option to send an output when the input is no longer blocked: either disabled or the current input value</li> <li>- Send output <ul style="list-style-type: none"> <li>o On any input - Every new value on an input produces a new output value</li> <li>o On any input change - Only if one of the input values change, an output value is sent</li> <li>o On output change - Only if the output value changes, it is sent</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Binary input, with the blocking BIT</li> <li>- Numeric input, to pass through</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Numeric output, passing on the incoming number if it is not blocked</li> </ul>

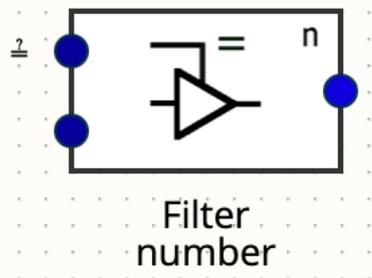
## 23. Block text

	<p>Only passes the incoming text value through as an output when it is not blocked.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Block input if <ul style="list-style-type: none"> <li>o Block = 0 - Block the input, if the blocking is BIT is set to 0 / OFF</li> <li>o Block = 1 - Block the input, if the blocking is BIT is set to 1 / ON</li> </ul> </li> <li>- Send output <ul style="list-style-type: none"> <li>o On any input - Every new value on an input produces a new output value</li> <li>o On any input change - Only if one of the input values change, an output value is sent</li> <li>o On output change - Only if the output value changes, it is sent</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Binary input, with the blocking BIT</li> <li>- Text input, to pass through</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Text output, passing on the incoming text if it is not blocked</li> </ul>

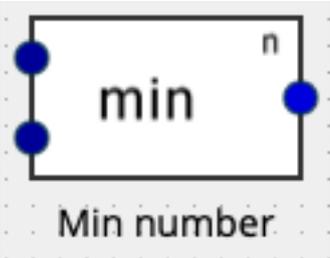
### 24. Filter bit

	<p>Only passes the incoming (bottom) binary value through as an output when it is the same as the filter (top) value.</p>
<p>Parameters: N/A</p>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Binary input, with the filter value BIT</li> <li>- Binary input, to pass through</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Binary output, passing on the incoming binary value if it is the same as the filter value</li> </ul>

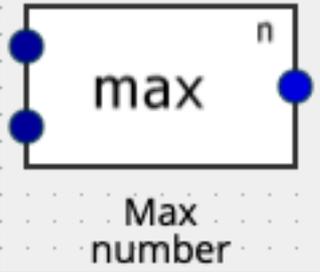
### 25. Filter number

	<p>Only passes the incoming (bottom) numeric value through as an output when it is the same as the filter (top) value.</p>
<p>Parameters: - N/A</p>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Numeric input, with the filter value</li> <li>- Numeric input, to pass through</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Numeric output, passing on the incoming number if it is the same as the filter value</li> </ul>

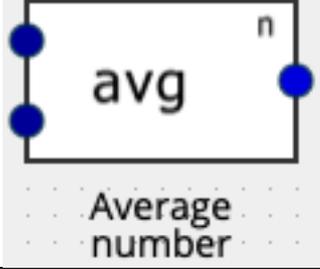
### 26. Min number

	<p>Provides the minimal value of both numeric inputs as an output.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Send output <ul style="list-style-type: none"> <li>o On any input - Every new value on an input produces a new output value</li> <li>o On any input change - Only if one of the input values change, an output value is sent</li> <li>o On output change - Only if the output value changes, it is sent</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- 2x Numeric input</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Numeric output, equal to the lowest value of the inputs</li> </ul>

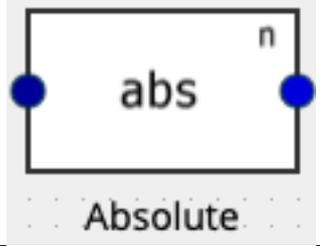
### 27. Max number

 <p>The image shows a Scratch 'max' block. It is a rectangular block with a light gray background and a dotted border. The word 'max' is centered in a large black font. Below it, the words 'Max number' are written in a smaller black font. There are two blue circular input ports on the left side and one blue circular output port on the right side. A small 'n' is in the top right corner.</p>	<p>Provides the maximum value of both numeric inputs as an output.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Send output <ul style="list-style-type: none"> <li>o On any input                      - Every new value on an input produces a new output value</li> <li>o On any input change           - Only if one of the input values change, an output value is sent</li> <li>o On output change               - Only if the output value changes, it is sent</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- 2x Numeric input</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Numeric output, equal to the highest value of the inputs</li> </ul>

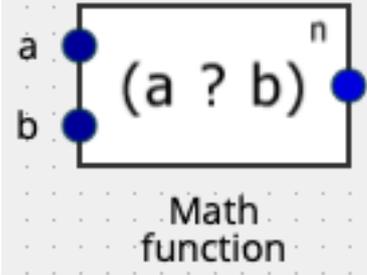
### 28. Average number

 <p>The image shows a Scratch 'avg' block. It is a rectangular block with a light gray background and a dotted border. The word 'avg' is centered in a large black font. Below it, the words 'Average number' are written in a smaller black font. There are two blue circular input ports on the left side and one blue circular output port on the right side. A small 'n' is in the top right corner.</p>	<p>Provides the average value of both numeric inputs as an output.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Send output <ul style="list-style-type: none"> <li>o On any input                      - Every new value on an input produces a new output value</li> <li>o On any input change           - Only if one of the input values change, an output value is sent</li> <li>o On output change               - Only if the output value changes, it is sent</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- 2x Numeric input</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Numeric output, equal to the average value of the inputs</li> </ul>

### 29. Absolute

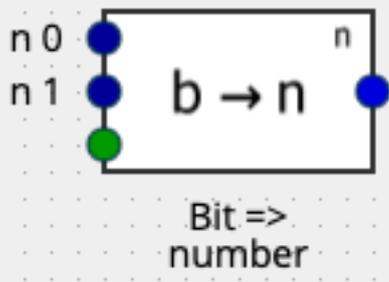
 <p>The image shows a Scratch 'abs' block. It is a rectangular block with a light gray background and a dotted border. The word 'abs' is centered in a large black font. Below it, the word 'Absolute' is written in a smaller black font. There is one blue circular input port on the left side and one blue circular output port on the right side. A small 'n' is in the top right corner.</p>	<p>Provides the absolute value of the numeric input as an output. So, a negative value is made positive. For instance, -20 becomes 20. Positive values remain unchanged.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Send output <ul style="list-style-type: none"> <li>o On any input                      - Every new value on an input produces a new output value</li> <li>o On any input change           - Only if one of the input values change, an output value is sent</li> <li>o On output change               - Only if the output value changes, it is sent</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Numeric input</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Numeric output, equal to the absolute value of the input</li> </ul>

### 30. Math function

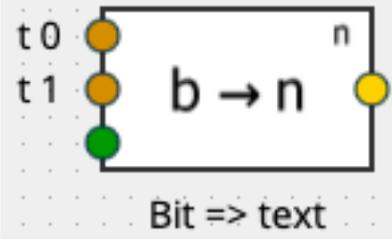
	<p>Performs the set math function on both inputs and provides it as an output.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Function <ul style="list-style-type: none"> <li>○ <math>a + b</math> - Add</li> <li>○ <math>a - b</math> - Subtract</li> <li>○ <math>a \times b</math> - Multiply</li> <li>○ <math>a / b</math> - Divide</li> <li>○ <math>a ^ b</math> - Exponentiation</li> </ul> </li> <li>- Send output <ul style="list-style-type: none"> <li>○ On any input - Every new value on an input produces a new output value</li> <li>○ On any input change - Only if one of the input values change, an output value is sent</li> <li>○ On output change - Only if the output value changes, it is sent</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- 2x Numeric input</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Numeric output, as a result of the math function on both inputs</li> </ul>

## Conversion

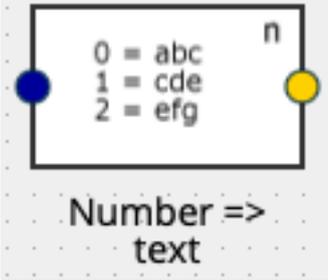
### 31. Bit => number

	<p>Convert a binary value into a numeric value, based on the provided inputs.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Send output <ul style="list-style-type: none"> <li>○ On any input - Every new value on an input produces a new output value</li> <li>○ On any input change - Only if one of the input values change, an output value is sent</li> <li>○ On output change - Only if the output value changes, it is sent</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Numeric input with the value for binary input 0 / OFF</li> <li>- Numeric input with the value for binary input 1 / ON</li> <li>- Binary input</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Numeric output, equal to input n 0 if the binary input is 0 / OFF and equal to n 1 if it is 1 / ON</li> </ul>

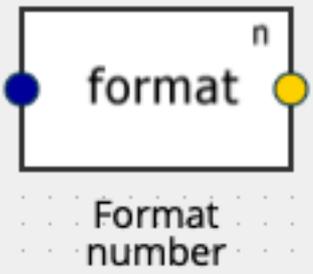
### 32. Bit => text

	<p>Convert a binary value into a text value, based on the provided inputs.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Send output <ul style="list-style-type: none"> <li>o On any input - Every new value on an input produces a new output value</li> <li>o On any input change - Only if one of the input values change, an output value is sent</li> <li>o On output change - Only if the output value changes, it is sent</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Text input with the value for binary input 0 / OFF</li> <li>- Text input with the value for binary input 1 / ON</li> <li>- Binary input</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Text output, equal to input t 0 if the binary input is 0 / OFF and equal to t 1 if it is 1 / ON</li> </ul>

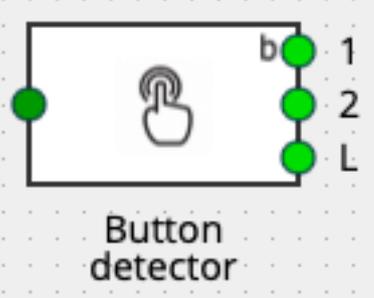
### 33. Number => text

	<p>Convert a numeric value into a text value, based on the set parameters. An unknown numeric value is ignored and does not lead to a new output.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- 20x [Numeric value] <ul style="list-style-type: none"> <li>o Text value - Translation table of 20 numeric values to be converted into text</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Numeric input</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Text output, based on the translation table in the parameters</li> </ul>

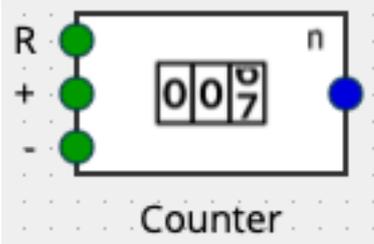
### 34. Format number

	<p>Formats a numeric value as a text, for instance the number 19,3512 as "Max 19,35 kWh".</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Decimals - Amount of digits after the comma, to which should be rounded down</li> <li>- Prefix text - Text to be placed in front of the number</li> <li>- Suffix text - Text to be placed behind the number</li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Numeric input</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Text output, displaying the numeric value as a formatted text</li> </ul>

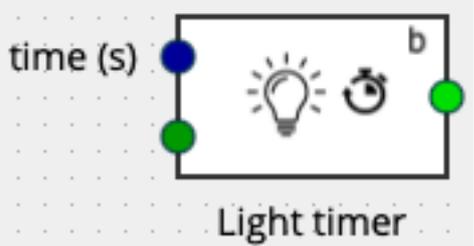
**Intelligent elements**  
**35. Button detector**

	<p>Interprets the pulse from a push button into three possible outputs: single push, double push and long push. Depending on the detected pulse it produces a 1 / ON for one of the three outputs.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- n/a</li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Binary input</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Binary output for single push</li> <li>- Binary output for double push</li> <li>- Binary output for long push</li> </ul>

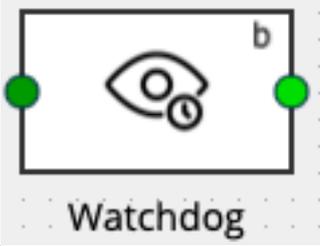
**36. Counter**

	<p>Provides a numeric output based on the amount of counted pulses on the binary inputs.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- n/a</li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Binary input to reset the counter</li> <li>- Binary input to increase the counter</li> <li>- Binary input to decrease the counter</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Numeric output with the count value</li> </ul>

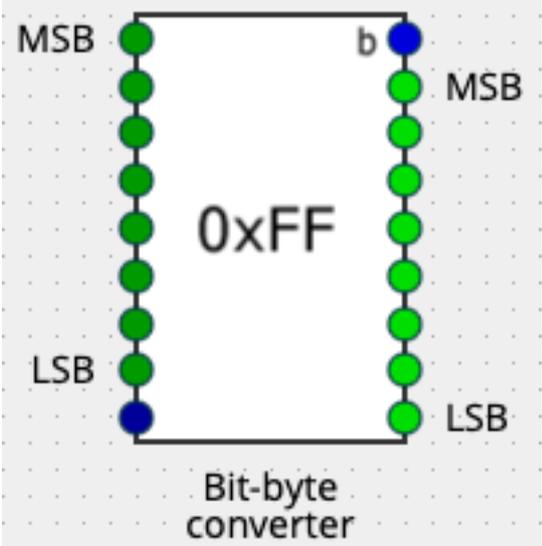
**37. Light timer**

	<p>Provides a delayed shut off for the provided amount of seconds after a 1 / ON binary input. Optionally, a 0 / OFF value can cancel the timer and shut off the output immediately.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Allow immediate off <ul style="list-style-type: none"> <li>o Yes - An input of 0 / OFF immediately sets the output to 0 / OFF as well</li> <li>o No - An input of 0 / OFF is ignored</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Numeric input with the delay time in seconds</li> <li>- Binary input</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Binary output providing 1 / ON for the duration of the provided delay time</li> </ul>

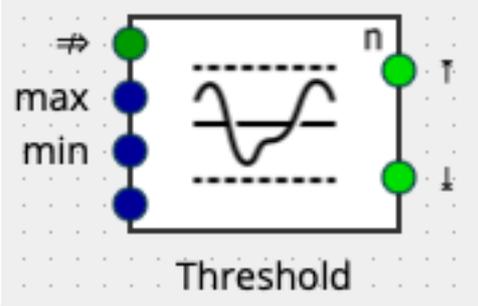
### 38. Watchdog

	<p>Gives an alarm on the binary output when there has been no new input (either 0 / OFF or 1 / ON) within the provided period of time.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Watchdog timeout (s)                      - Amount of seconds wherein a new pulse is required on the binary input</li> <li>- Send on Alarm <ul style="list-style-type: none"> <li>o 0    - Send a 0 / OFF to the binary output as an alarm</li> <li>o 1    - Send a 1 / ON to the binary output as an alarm</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Binary input to be monitored</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Binary output where the alarm is sent</li> </ul>

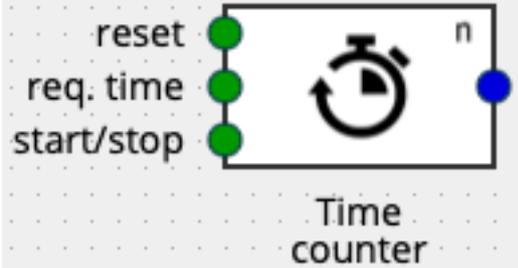
### 39. Bit-byte converter

	<p>Converts either 8 bits into 1 byte, or 1 byte into 8 bits. The order of bits is the most significant bit (128) on top and the least significant bit below.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- n/a</li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- 8x Binary inputs from MSB (Most Significant Bit) to LSB (Least Significant Bit)</li> <li>- 1x Numeric input (Byte value)</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- 1x Numeric output (Byte value)</li> <li>- 8x Binary outputs from MSB (Most Significant Bit) to LSB (Least Significant Bit)</li> </ul>

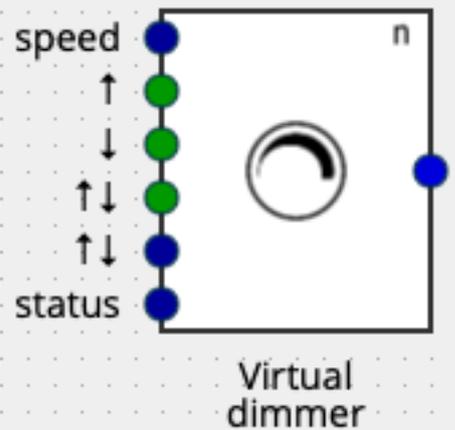
## 40. Threshold

	<p>Validates the bottom numeric input value in regard to the threshold values and sends a value to the corresponding binary output if it is out of range. The threshold validation can be blocked with a binary input.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Use threshold <ul style="list-style-type: none"> <li>o Upper - Only the upper threshold is validated</li> <li>o Lower - Only the lower threshold is validated</li> <li>o Upper and lower - Both thresholds are validated</li> </ul> </li> <li>- Block input when <ul style="list-style-type: none"> <li>o Block = 0 - Block the input when the blocking BIT is 0 / OFF</li> <li>o Block = 1 - Block the input when the blocking BIT is 1 / ON</li> </ul> </li> <li>- Send on upper threshold <ul style="list-style-type: none"> <li>o 0 - When the upper threshold is exceeded, send a 0 / OFF</li> <li>o 1 - When the upper threshold is exceeded, send a 1 / ON</li> </ul> </li> <li>- Send on lower threshold <ul style="list-style-type: none"> <li>o 0 - When the lower threshold is exceeded, send a 0 / OFF</li> <li>o 1 - When the lower threshold is exceeded, send a 1 / ON</li> </ul> </li> <li>- Send output <ul style="list-style-type: none"> <li>o On any input - Every new value on an input produces a new output value</li> <li>o On output change - Only if the output value changes, it is sent</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Binary input, with the blocking BIT</li> <li>- Numeric input with the upper threshold</li> <li>- Numeric input with the lower threshold</li> <li>- Numeric input that is to be validated</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Binary output when the upper threshold is exceeded</li> <li>- Binary output when the lower threshold is exceeded</li> </ul>

#### 41. Time counter

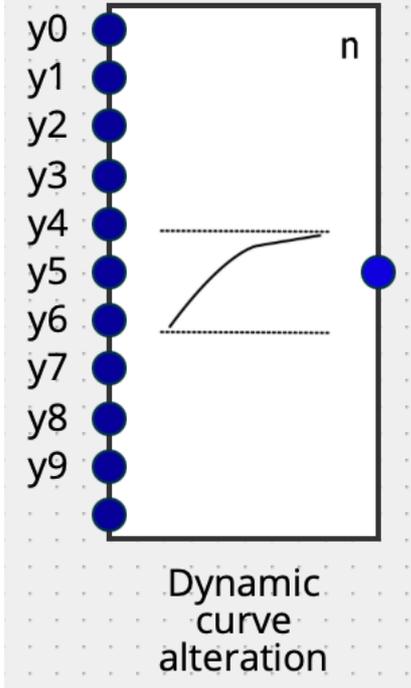
	<p>Stopwatch function, counting the time in seconds that the binary input “start/stop” is 1 / ON. The counted time is sent on the numeric output at a start/stop event, on request and if desired also cyclical. With the reset binary input, the counter can be set to 0.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Send time on             <ul style="list-style-type: none"> <li>o Start, Stop and Req. - Send the time on start/stop and on request</li> <li>o S, S, R and Cyclic - Send the time on start/stop, on request and cyclic (see parameter)</li> </ul> </li> <li>- Cyclic time (in sec) - If set to cyclic, period in seconds to send the counted time</li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Binary input to reset the counter</li> <li>- Binary input to request the current counted time</li> <li>- Binary input to start / stop the counter</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Numeric value with the counted time in seconds</li> </ul>

#### 42. Virtual dimmer

	<p>Virtual dimmer allowing several different ways to increase or decrease a dimmer. You can use a binary input / pulse button (up, down or toggle) or a numeric input, to increase and decrease the dimmer. When using the numeric input, it is only relevant whether the value is negative or positive, not the actual value itself.</p> <p>The speed of dimming is set with a separate numeric input, in seconds from 0 to 100.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- Minimum dim value - Minimal dim value that is sent out</li> <li>- Under minimum dim value set to 0             <ul style="list-style-type: none"> <li>o On - Send a 0 for all values below the minimum dim value</li> <li>o Off - Sends no value under the minimum, until the value is truly 0</li> </ul> </li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- Numeric input with the desired speed in seconds to dim from 0 to 100</li> <li>- Binary input to dim up</li> <li>- Binary input to dim down</li> <li>- Binary input with toggle to dim up/down</li> <li>- Numeric input, increasing or decreasing the dim value depending if the value is positive or negative</li> <li>- Numeric input, with the current dim value (status, 0-100%)</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Numeric output with dim value (0-100%)</li> </ul>



### 45. Dynamic curve alteration

 <p style="text-align: center;">Dynamic curve alteration</p>	<p>With the dynamic curve alteration, the bottom numeric value is translated to an output value to achieve a steeper or flatter curve, for instance for a dimmer. The mapping is created by setting 10 points that are mapped to the top 10 numeric inputs y0 to y9, to allow a dynamic alteration of the curve.</p>
<p>Parameters:</p> <ul style="list-style-type: none"> <li>- 10x Input – Output mapping - Table with 10 translate values mapped to numeric inputs y0 to y9, to adjust the curve as desired</li> </ul>	
<p>IN:</p> <ul style="list-style-type: none"> <li>- 10x Numeric input y0-y9 to adjust the curve</li> <li>- Numeric input, that requires the curve alteration</li> </ul>	<p>OUT:</p> <ul style="list-style-type: none"> <li>- Numeric output with the adjusted curve</li> </ul>